



ST 05



Elektrofahwerk
"normale Bauhöhe"

"Standard headroom"
electric trolley

Chariot électrique
"hauteur perdue normale"

1/1

KFN 10.05E						*	
HW	C3	C4	C5	C6			
[m]	[mm]						
7	357	281	145	90	K	S	Standard
15	457	303		100			
24	506	303		100			
7	386	303	145	100	S		Option

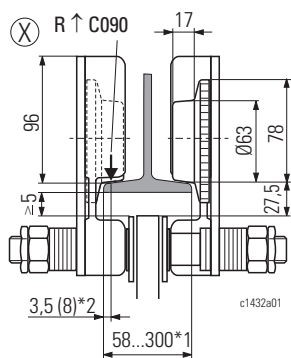

2/1

KFN 10.05E						*	
HW	C3	C4	C5	C6			
[m]	[mm]						
3,5	357	281	145	90	K	S	Standard
7,5	457	303		100			
12	506	303		100			
3,5	386	303	145	100	S		Option

* Material des Kettenspeichers

K = Kunststoff
 S = Stahlblech
 T = Textil

*1 Standard; bei Flanschbreite >260 mm sind Führungsrollen erforderlich

*2 Bei geneigtem Flansch

* Material of chain box

K = Plastic
 S = Sheet metal
 T = Fabric

*1 Standard; guide rollers necessary for flange width >260 mm

*2 With sloping flange

* Matériau du bac à chaîne

K = Matière plastique
 S = Tôle d'acier
 T = Textile

*1 Standard; galets de guidage nécessaires pour largeur d'aile >260 mm.

*2 Avec bride inclinée

Auswahltabelle: ↑ 14

Selection table: ↑ 14

Tableau de sélection : ↑ 14

